


DESIGN FLOW GUIDE FOR INTERIOR DESIGNERS



INTERIOR
DESIGNER

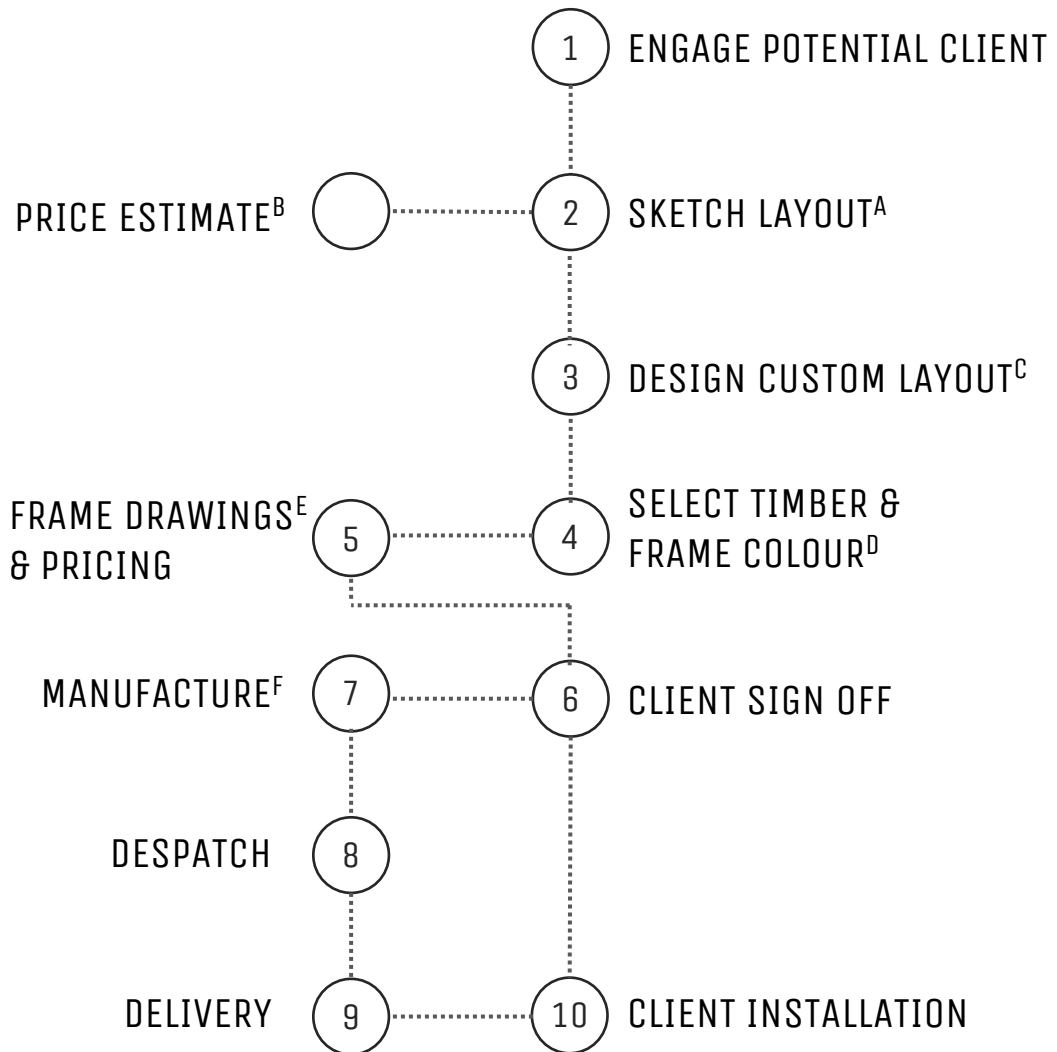

NOTES

- A. PLEASE REFER TO INITIAL DESIGN IDEA GUIDELINES
- B. ESTIMATES CAN USUALLY BE GIVEN WITHIN A FEW HOURS
- C. PLEASE REFER TO DETAILED DESIGN GUIDELINES
- D. FRAME COLOUR AND TIMBER MAY HAVE AN EFFECT ON PRICING IF SPECIALIST TIMBER OR FINISHES ARE REQUIRED
- E. DETAILED DRAWINGS AND PRICING USUALLY WITHIN 48 HOURS
- F. MANUFACTURE TYPICALLY BETWEEN 4-8 WEEKS DEPENDING ON TIMBER SELECTION



RIVER BESPOKE

GUIDELINES FOR INTERIOR DESIGNERS

BASIC SKETCH LAYOUT

1. A SIMPLE SKETCH IS GENERALLY ENOUGH TO GAIN A FAIRLY ACCURATE INDICATION OF PRICE. WE DO HAVE ONE OR TWO GUIDELINES TO MAKE THIS MORE PRECISE.
2. GENERALLY STICK TO FRAME SIZES SMALLER THAN 700MM X 700MM. IT IS POSSIBLE TO MAKE LARGER, HOWEVER, WE WOULD NEED TO TAKE CAREFUL CONSIDERATION OF WALL TYPES, TYPE OF FIXINGS AND NUMBER OF FIXINGS.
3. NUMBER OF TIMBER SHELVES PER METAL FRAME SHOULD BE DETAILED FOR EACH SHELF AND LIMITED TO MAXIMUM OF 2.
4. OUR INITIAL ESTIMATES WILL ASSUME OAK TIMBER.
5. WE WILL GIVE TWO PRICINGS BASED ON A STANDARD POWDER COATED FINISH IN ANY RAL COLOUR AND A PREMIUM ANODIC (METALLIC EFFECT) POWDER COATED FINISH.

DETAILED DESIGN GUIDELINES

WALL TYPES AND LOADING

1. SHELVES ARE SUITABLE FOR ALL TYPES OF WALL.
2. LOADING SHOULD BE TAKEN INTO CONSIDERATION AND SUITABLE FIXINGS USED.
3. GENERALLY SHELVES NARROWER THAN 500MM WILL BE FITTED WITH TWO REAR STAINLESS BRACKETS. SHELVES LARGER THAN 500MM WILL HAVE THREE.
4. SHELVES WILL TOLERATE A MAXIMUM LOADING OF 4KG PER 100MM WIDTH.
5. WEIGHT GUIDE 295 X 295 – 2KG, 650 X 650 – 8KG.
6. IF THERE ARE SPECIAL LOADING REQUIREMENTS THEN PLEASE CONTACT US FOR OPTIONS.

SERVICES

1. WE ARE ABLE TO MANUFACTURE THE SHELVES WITH VERY PRECISE BRACKET POSITIONS, IF THERE ARE ELECTRICAL, GAS OR WATER SERVICES LOCATED BEHIND A WALL PLEASE INDICATE THESE TO US AND WE WILL LOCATE BRACKETS ACCORDINGLY.

LOCATION AND USAGE

1. PLEASE NOTIFY US WHETHER THESE SHELVES ARE TO BE USED IN DAMP ENVIRONMENTS (BATHROOMS ETC.), WE ARE ABLE TO HAVE FRAMES GALVANISED PRIOR TO POWDER COATING.
2. WE ALWAYS ASSUME SHELVES ARE FOR INTERNAL USE WHERE NO DAMP PROTECTION IS REQUIRED.
3. TIMBER SHELVES ARE TREATED WITH FOUR COATS OF A WATER BASED LACQUER, THIS MAY MARK IF WET ITEMS ARE LEFT ON THE SHELF. IF A WATERPROOF FINISH IS REQUIRED THEN PLEASE ADVISE.

FITTING

1. SHELVES WILL BE SUPPLIED WITH A DRILLING GUIDE, EACH SHELF WILL BE NUMBERED AND IDENTIFIED ON THE DRAWINGS SUPPLIED
2. EACH BRACKET HAS ± 7 MM OF HORIZONTAL FITTING ADJUSTMENT AND ± 2 MM OF VERTICAL ADJUSTMENT

